



Husky™ e-Series

Electric Air Charged Double Diaphragm Pump






- Only electric pump on the market that will stall under pressure
- Up to 50% more efficient than other air operated diaphragm pumps
- Eliminate pulsation without the addition of pulsation dampeners

PROVEN QUALITY. LEADING TECHNOLOGY.

THE LATEST IN ENERGY EFFICIENT PUMPS

Performance

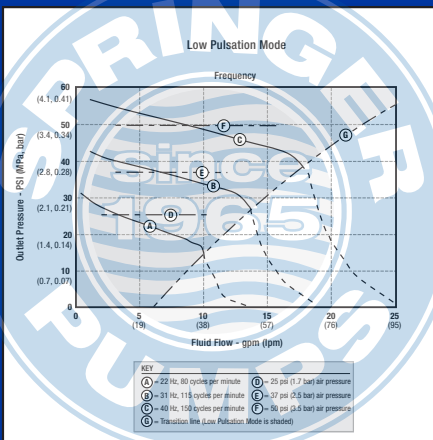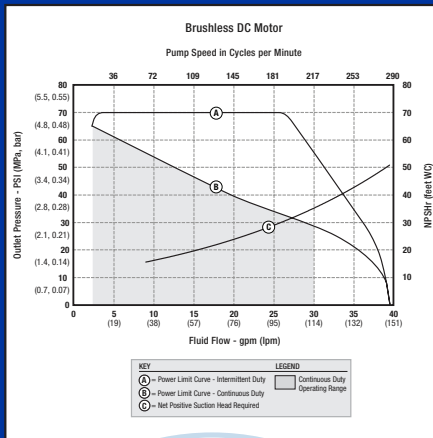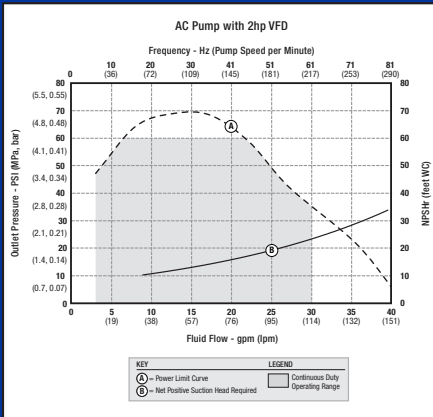

Would you like to eliminate unnecessary pump failures for your application? Would you like to improve your facilities energy efficiency and create a quieter and cleaner work environment for your employees. Graco's Husky e-Series pump will help you achieve all of those items!

- ✓ Patented technology allows pump to **stall under pressure** preventing pump failures from clogged lines or closed valves
- ✓ **Energy efficient** electric drive reduces energy consumption up to 5x compared to traditional air operated diaphragm pumps
- ✓ Seal-less diaphragm pump design **eliminates leaking** rotational seals and failures due to run-dry pump conditions

Pick the pump that works for you


We've listened to what you want out of a pump and designed the Husky e-Series to meet your needs!

Feature	Graco Electric Diaphragm Pumps	Other Electric Diaphragm Pumps	Air-Operated Diaphragm Pumps	Peristaltic Pumps	Progressive Cavity Pumps	Rotary Lobe Pumps
Stalls under pressure	X		X			
Runs dry	X	X	X	X		
Self priming	X	X	X	X	X	
Metering capabilities	X	X		X	X	
Energy efficient electric drive	X	X		X	X	X
No rotational shaft seal	X	X	X	X		
Low pulsation operation mode	X				X	X

Need low pulsation? No Problem!

Our Husky e-Series pumps are ideal for applications that require low pulsation and a smooth flow. The patented air charged drive allows for the elimination or reduction of pulsation **WITHOUT** expensive pulsation dampness or surge tanks.

Pulsation Chart

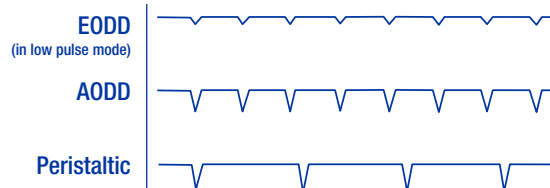

1 Durable Pump Technology

- Handles slurries and abrasives all without damage to the pump
- Gentle on shear sensitive material

2 Diaphragm Pump

- Runs dry
- No rotating or mechanical seals
- Self priming

3 Electric Drive

- Reduce energy consumption and operating costs
- Increase pump control
- Accurately transfer fluid

4 Motor Options


- Operate on 110v, 220v or 480v power
- Available in AC or Brushless DC
- Hazardous location motor options available

5 Fluid Section

- Create the pump you need with multiple material offerings for manifolds, seats, balls, and diaphragms

6 Patented Air Charged Drive

- Increase diaphragm life without compromising your fluid
- Ability to reduce pulsation on fluid outlet
- Stalls under pressure without additional switches and controls

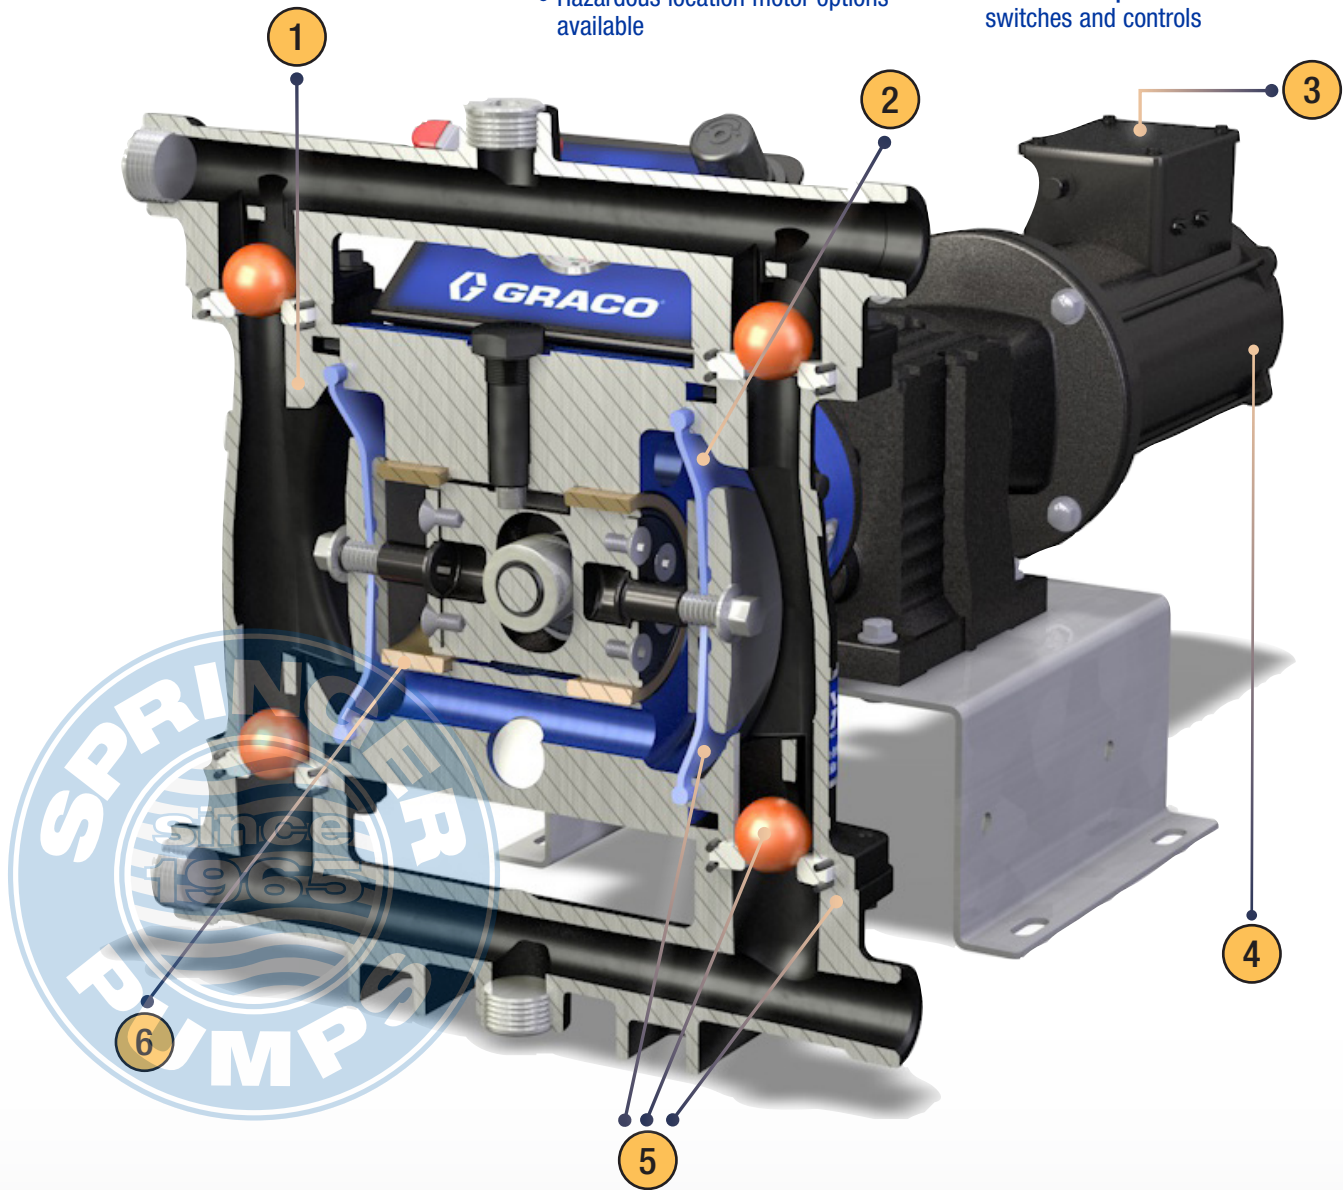

Find the Right Pump for your Application

Graco is making it easy to select a pump that's right for you.

To order a Husky pump, go to www.graco.com/husky to use the selector tool or contact your distributor.



Technical Specifications

Maximum fluid working pressure	70 psi (4.8 bar, 0.48 Mpa)
Air pressure operating range	20 to 125 psi (1.4 to 8.6 bar, 0.14 to 0.86 Mpa)
Air inlet size	1/2 in npt(f)
Maximum suction lift*	Wet: 29 ft (8.8 m); Dry: 16 ft (4.9 m)
Maximum size pumpable solids	1/8 in (3.2 mm)
Ambient air temperature range for operation and storage**	32°F to 104°F (0°C to 40°C)
Fluid displacement per cycle	0.17 gallons (0.64 L)
Maximum free-flow delivery	50 gpm (189 lpm)
Maximum pump speed	280 cpm
Fluid Inlet and Outlet Size	
Aluminum and Stainless Steel	1 in npt(f) or 1 in bspt
Polypropylene	1 in ANSI/DIN Raised Face Flange

*Reduced if balls don't seat well due to damaged balls or seats, lightweight balls, or extreme speed of cycling
 **Exposure to extreme low temperatures may result in damage to plastic parts

Popular Models

Husky 1050e Popular Models

Part Number	Center Section	Fluid Section	Porting	Seat	Ball	Diaphragm	Motor*	Compressor**
648150	Aluminum	Aluminum	NPT	Hytrel	Acetal	Hytrel	Standard 2 HP AC	Yes (110V)
648153	Aluminum	Aluminum	NPT	Santoprene	Santoprene	Santoprene	Standard 2 HP AC	Yes (110V)
648190	Aluminum	Aluminum	NPT	Stainless Steel	Weighted Neoprene	Neoprene Overmolded	Brushless DC	Yes (110V)
648182	Aluminum	Aluminum	NPT	Stainless Steel	PTFE	2-Piece PTFE w/ Santoprene Backer	Brushless DC	Yes (110V)
648187	Aluminum	Aluminum	NPT	Buna	Buna	Buna	Brushless DC	Yes (110V)
650079	Aluminum	Polypropylene	End Flange	Santoprene	Santoprene	Santoprene	Standard 2 HP AC	Yes (110V)
650099	Aluminum	Polypropylene	End Flange	Polypropylene	PTFE	2-Piece PTFE w/ Santoprene Backer	Brushless DC	Yes (110V)
650102	Aluminum	Polypropylene	End Flange	Polypropylene	PTFE	PTFE Overmolded	Brushless DC	Yes (110V)
650264	Stainless Steel	Polypropylene	End Flange	Polypropylene	PTFE	2-Piece PTFE w/ Santoprene Backer	Brushless DC	Yes (110V)
651890	Aluminum	Stainless Steel	NPT	Stainless Steel	PTFE	2-Piece PTFE w/ Santoprene Backer	Standard 2 HP AC	Yes (110V)
653054	Stainless Steel	Stainless Steel	NPT	Stainless Steel	PTFE	PTFE Overmolded	Standard 2 HP AC	Yes (110V)
651908	Aluminum	Stainless Steel	NPT	Stainless Steel	PTFE	2-Piece PTFE w/ Santoprene Backer	Brushless DC	Yes (110V)

*Brushless DC includes Graco Controller
 **Options available without compressor

Husky 1050e Hazardous Location Pumps

Part Number	Center Section	Fluid Section	Porting	Seat	Ball	Diaphragm	Motor	Compressor
648108	Aluminum	Aluminum	NPT	Santoprene	Santoprene	Santoprene	2 HP North American Haz Loc Motor	No
648092	Aluminum	Aluminum	NPT	Stainless Steel	PTFE	2-Piece PTFE w/ Santoprene Backer	2 HP ATEX Motor	No
651854	Aluminum	Stainless Steel	NPT	Stainless Steel	PTFE	2-Piece PTFE w/ Santoprene Backer	2 HP ATEX Motor	No
651863	Aluminum	Stainless Steel	NPT	Stainless Steel	PTFE	2-Piece PTFE w/ Santoprene Backer	2 HP North American Haz Loc Motor	No

Husky 1050e Cart Mounted Systems

Part Number	Center Section	Fluid Section	Porting	Seat	Ball	Diaphragm	Motor*	Compressor
24Y338	Aluminum	Aluminum	NPT	Stainless Steel	Weighted Neoprene	Neoprene Overmolded	Brushless DC	Yes (110V)
24Y553	Aluminum	Aluminum	NPT	Santoprene	Santoprene	Santoprene	Brushless DC	Yes (110V)
24Y555	Aluminum	Aluminum	NPT	Hytrel	Acetal	Hytrel	Brushless DC	Yes (110V)
24Y557	Aluminum	Aluminum	NPT	Buna	Buna	Buna	Brushless DC	Yes (110V)
24Y559	Aluminum	Polypropylene	End Flange	Polypropylene	PTFE	2-Piece PTFE w/ Santoprene Backer	Brushless DC	Yes (110V)
24Y561	Aluminum	Stainless Steel	NPT	Stainless Steel	PTFE	2-Piece PTFE w/ Santoprene Backer	Brushless DC	Yes (110V)

*Brushless DC includes Graco Controller

All written and visual data contained in this document are based on the latest product information available at the time of publication. Graco reserves the right to make changes at any time without notice.

Call today for product information or to request a demonstration.
877.84GRACO (1-877-844-7226) or visit us at www.graco.com.



©2015 Graco Inc. Draft only.

All other brand names or marks are used for identification purposes and are trademarks of their respective owners.

www.springerpumps.com

Toll Free: 877-844-7226

Intl: +301-484-9449/2900

Toll Free: 877-844-7226

Intl Fax: +301-215-7211/2900