

# D Series

Drop-In Submersed Coil  
1 – 30 Ton Capacity


## No Clog and Cleanable

Eliminate the worry of a clogged heat exchanger. Drop-in chillers work in the dirtiest, unfiltered processes without additional pumps. The D Series can be used in existing tanks for grinding and heavy cutting applications and provide the added benefit of reduced floor space.

## Product Features

- Drop-In, Stainless Coil Design
- Capacities from 12,000 BTU/hr to 360,000 BTU/hr
- Water, Water/Glycol, Water-Soluble, and Oil-Based Fluids
- R407C Refrigerant
- Highly Customizable
- Air-Cooled Condenser (Standard)
- Powder Coated Cabinet
- Voltage Options Available
- Fluid Setpoint 70–95°F
- Ambient Temperature Range 50–95°F
- Temperature Stability  $\pm 3^\circ\text{F}$  (Optional  $\pm 1^\circ\text{F}$ )
- 18-Month Parts and Labor Warranty
- 24/7 Service and Support
- Next Day Parts Available

(Fluid and ambient temperatures can vary. Consult factory for the effect on capacity. Stated capacity based on 85°F fluid setpoint and 95°F ambient.)

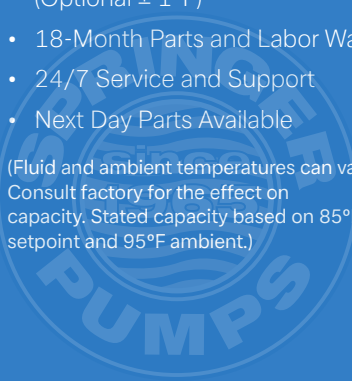

Glen  
Dimplex  
Thermal  
Solutions



Koolant  
Koolers



## Base Configuration

- Air-Cooled Condenser
- Hermetically Sealed Scroll Compressor
- NEMA 1 Standard E-Box
- Digital Temperature Controller
- Stainless Submersible Heat Exchanger
- Vertical Air Discharge
- Phase Monitor
- Cleanable Air Filters

## Options\*

- Remote or Water-Cooled Condensers
- Fused Disconnect
- Remote PDG (up to 150')
- Remote Box (w/ PGD)
- Remote Start/Stop
- Voltage Options
- Ambient Tracking
- Lifting Frame
- Service/Maintenance Packages
- cUL Certification

\*These are pre-designed options. Any configuration is available, but will affect delivery.

MODEL	CAPACITY	ELECTRICAL	FLA	MINIMUM COIL FRAME DEPTH	UNIT DIMENSIONS (LxWxH)	CRATED WEIGHT
WATER/WATER SOLUBLE	BTU/HR	VOLTAGE	AMPS	INCH	INCH	LBS
DVI-1000	12,000	230/3/60 460/3/60	6.8 3.5	18	36x25x40	800
DVI-2000	24,000	230/3/60 460/3/60	20 9.5	22	36x25x40	800
DVI-3000	36,000	230/3/60 460/3/60	20 9.5	28	35x35x54	1,000
DVI-5000	60,000	230/3/60 460/3/60	31 15.8	28	35x35x54	1,000
DVI-7500	90,000	230/3/60 460/3/60	43.8 22.3	33	67x35x54	1,350
DVI-10000	120,000	230/3/60 460/3/60	52.8 27	33	67x35x54	1,350
DVI-15000	180,000	230/3/60 460/3/60	79.5 40.5	36	50x46x74	1,600
DVI-20000	240,000	460/3/60	48.3	33	73x67x54	1,800
DVI-30000	360,000	460/3/60	76.8	36	84x48x74	3,000

OIL BASED	BTU/HR	VOLTAGE	AMPS	INCH	INCH	LBS
DVI-1000	11,000	230/3/60 460/3/60	9 4.6	18	36x25x40	800
DVI-2000	21,000	230/3/60 460/3/60	22.2 10.6	22	36x25x40	800
DVI-3000	32,000	230/3/60 460/3/60	22.2 10.6	28	35x35x54	1,000
DVI-5000	56,000	230/3/60 460/3/60	33.2 16.9	28	35x35x54	1,000
DVI-7500	81,000	230/3/60 460/3/60	48.2 24.5	33	67x35x54	1,350
DVI-10000	108,000	230/3/60 460/3/60	57.2 29.2	33	67x35x54	1,350
DVI-15000	165,000	230/3/60 460/3/60	83.9 42.7	36 33	50x46x74	1,600
DVI-20000	220,000	460/3/60	52.7	33	73x67x54	1,800
DVI-30000	330,000	460/3/60	81.2	36	84x48x74	3,000



**Glen  
Dimplex**  
Thermal  
Solutions



**Koolant  
Koolers**

**Glen Dimplex** Thermal Solutions  
2625 Emerald Drive, Kalamazoo, MI 49001



Rev 3.0  
10202017

Tel: 866-777-6060  
Fax: 866-777-6383

Springer Pumps, LLC

Website: [www.springerpumps.com](http://www.springerpumps.com)  
Int'l: +001 267 404 2910