


GATOR GATOR®

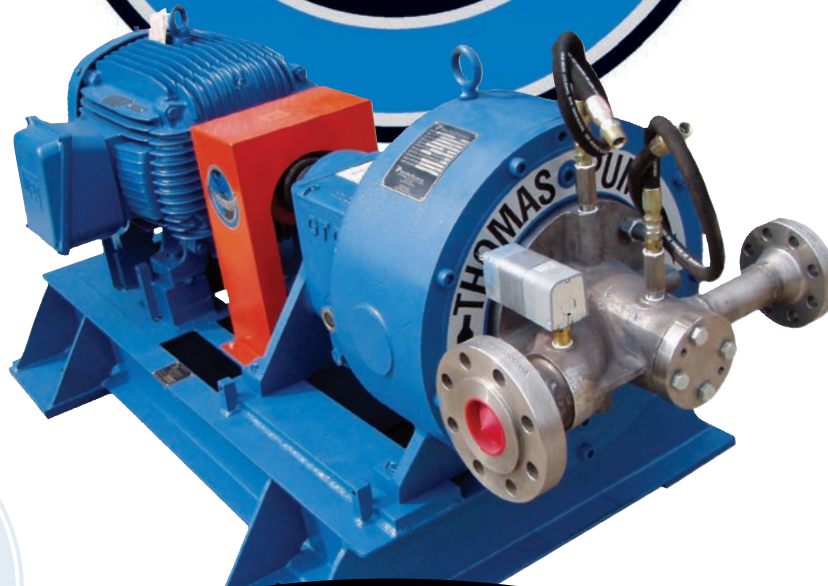

THOMAS PUMP & MACHINERY, INC.

Tel: 866-777-6060
Fax: 866-777-6383

Springer Pumps, LLC

Website: www.springerpumps.com
Int'l: +001 267 404 2910

GTO GATOR®

The GTO GATOR® is a heavy duty oil lubricated Pitot tube pump designed for critical applications making it the most reliable high-pressure pump in the marketplace.

With a full range of capacities from 30-400 GPM (6-100 m3hr) and pressures reaching 1600-psi (110 bar) the GTO GATOR® offers a variety of pump choices. A robust power frame, features that include only two basic working parts: 1) a rotating case and 2) a stationary pick-up tube, and a mechanical seal that only seals against suction pressure, ensure pump reliability in the most demanding applications.

Unlike conventional centrifugals and piston pumps that have a narrow window of operating performance, the GTO GATOR® can operate at any point on the performance curve pulsation free and hydraulically stable resulting in years of trouble free service.


The GTO GATOR® is known for high demand applications:

- Sanitation Cleaning
- Paper Mill Showers
- Truck Cleaning Facilities
- Brine Injection
- Environmental Waste Disposal

The GTO GATOR® stands for R-E-L-I-A-B-I-L-I-T-Y and P-E-R-F-O-R-M-A-N-C-E and is backed with a Two Year Power Frame Warranty.

HOW DOES THE GTO GATOR® OPERATE?

- Liquid enters the pump via the suction line (Blue) of the specially designed, interchangeable distribution manifold, passes the mechanical seal (the mechanical seal is only under suction pressure), and enters the rotor cover where it is accelerated to a speed identical to the rotor speed creating a liquid ring.
- The liquid ring travels at the same peripheral speed as the rotor and this moving fluid has a velocity head.
- The stationary, wing-shaped Pitot tube is placed inside the rotor and has a circular opening located close to the inside of the rotor.
- This Pitot tube has a double function.
 - 1) The liquid enters the Pitot tube openings at the periphery of the rotating rotor. This is where the velocity is the greatest.
 - 2) As the liquid enters the Pitot tube (Red) much of its kinetic energy is converted into pressure energy by the internal shape of the Pitot tube. Using this operating principle, relatively high pressures can be obtained in a single stage process.
- The pump generates a pulsation free flow and has a stable NPSHr curve.

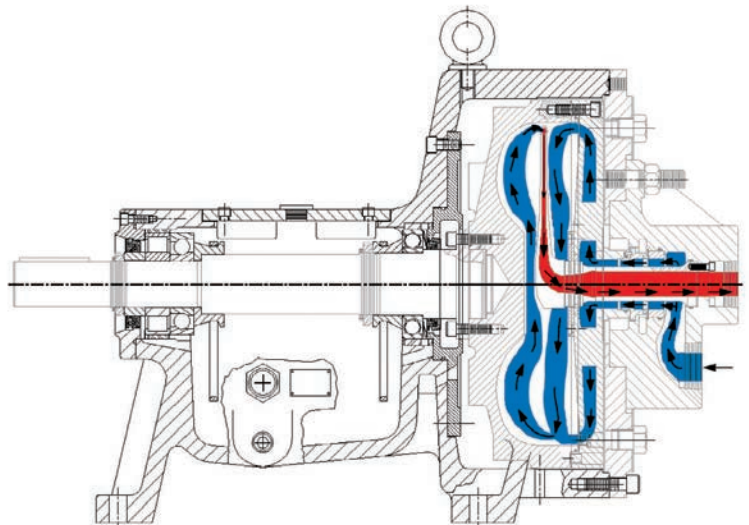

Features

- **Inpro® Labyrinth Oil Seals.** High quality oil seals keep outside environmental contaminants from entering the lubrication media, greatly extending bearing life.
- **Large Sight Glass.** Bull's-eye sight glass 1-1/4" simplifies oil level and oil condition monitoring that is critical to bearing life.
- **Powder Coated Oil Sump Lining.** Fusion Bonded Polyester process- TGIC designed to remove impurities in the castings and applied to the interior surface of the power frame oil sump that provides an impenetrable barrier between the iron frame and the oil, enhancing the long-term quality and cleanliness of the lubricating oil.
- **Magnetic Drain Plug.** A safety feature designed to magnetically collect damaging metallic contaminants away from the bearings.
- **Heavy-Duty Shaft Bearings.** X-Life Precision Bearings have extremely high reliability and extend bearing life with added benefits of smooth running, noise reduction, and reduced energy consumption.
- **Monitoring Locations.** Power frame has bearing monitor feature to allow RTD insertion for bearing temperature monitoring and optional areas can be added for vibration monitoring.
- **Powder Coated Power Frame.** Fusion Bonded Polyester process- TGIC designed to remove impurities in the castings and applied to the entire surface of the power frame. This process allows casing to be chemical resistant and the coating will not blister, soften, lose bond or discolor. Our Powder Coating Process resists salt spray, weathering, and humidity.





Ver. 9082009

Tel: 866-777-6060
Fax: 866-777-6383

Springer Pumps, LLC

Website: www.springerpumps.com
Int'l: +001 267 404 2910